## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SYLVANIA

Supplier's address: Product Compliance, Feilo Sylvania International Group Kft. Duna Tower -

Building B, 3rd Floor, Népfürdö Street 22, Budapest H-1138 Hungary

N AI -	1 · .1 · C·	0000000
IVIOGE	l identifier:	111114411

т.,	nn	Λf	امزا	h+	50		co.
ıу	hΕ	UI	IIBI	IΙL	30	u	ce:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	B22		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## **Product parameters**

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
<u> </u>	mption in on- 00 h), rounded st integer	5	Energy efficiency class	F	
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700	
On-mode power (P <sub>on</sub> ), expressed in W		4,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00	
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	106	Spectral power dis-	See image	
sions without	Width	60	tribution in the	in last page	
separate con- trol gear, light-	Depth	60	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>		Yes	If yes, equivalent power (W)	40		
			Chromaticity coordi-	0,458		
			nates (x and y)	0,410		
Parameters for	LED and OLED lig	ht sources:				
R9 colour rendering index value		1	Survival factor	1,00		
the lumen maintenance factor		0,94				
Parameters for	Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4		

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

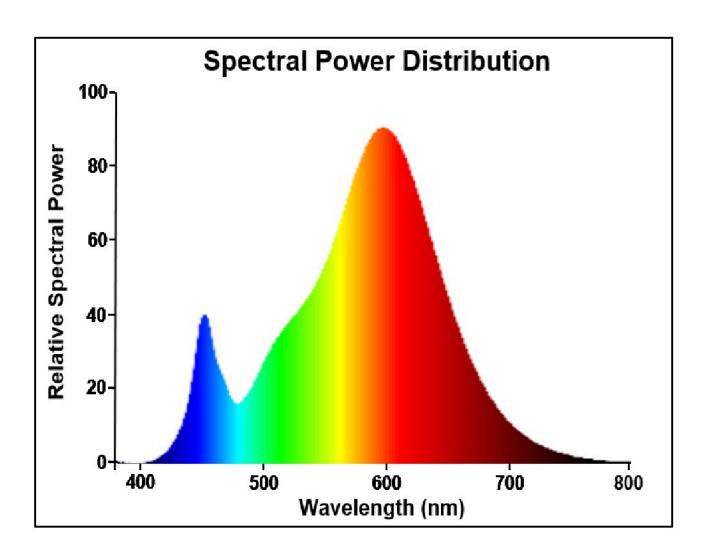

Model placed on the Union market from 09/07/2021



**EPREL registration number:** 542816 https://eprel.ec.europa.eu/qr/542816

Supplier: Feilo Sylvania International Group Kft. (Manufac Website: www.sylvania-lighting.com

turer)

**Customer care service:** 

Name: Product Compliance Website: www.sylvania-lighting.com

Email: product.compliance@sylvania-lighting.com Phone: +36 1 88 05 900

Address:

Feilo Sylvania International Group Kft. Duna Tower - Building B, 3rd Floor,

Népfürdö Street 22,

Budapest H-1138 Hungary