

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORION

Supplier's address: QC/LABOR, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LM E14/4,5W i.m. (Windstoßkerze/2700K/470lm)

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	40	
		Chromaticity coordinates (x and y)	0,463 0,420	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	6	Survival factor	0,90	
the lumen maintenance factor	0,94			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;


Table 3 : DIM-T35-E14-4.5W-Frost 2700K

Sample No.	Initial Φuse (lm)	3600H Φuse (lm)	X _{LUMF,MIN} % at 3600H	Survival factor at 3600H	Measured beam angle (°)	Measured I _{max} (cd)	Measured light output within π sr
1#	473.3	445.9	94.2%	Yes	-	-	-
2#	473.0	446.7	94.4%	Yes	-	-	-
3#	480.0	453.5	94.5%	Yes	-	-	-
4#	481.4	454.5	94.4%	Yes	-	-	-
5#	473.1	445.3	94.1%	Yes	-	-	-
6#	477.9	449.3	94.0%	Yes	-	-	-
7#	480.4	452.4	94.2%	Yes	-	-	-
8#	481.3	454.0	94.3%	Yes	-	-	-
9#	473.7	446.0	94.2%	Yes	-	-	-
10#	475.1	447.7	94.2%	Yes	-	-	-
Average	476.9	449.5	94.3%	Yes	-	-	-
Required	--	--	≥ 94%	≥ 90%	-	-	-

Table 4 for model LED driver

Sample No.	Measured voltage(V)	Measured current (mA)	Input wattage (W)	Output wattage (W)	Energy efficiency	P _{no} (W)	P _{sb} (W)	P _{net} (W)
1#	--	--	--	--	--	--	--	--
2#	--	--	--	--	--	--	--	--
3#	--	--	--	--	--	--	--	--
Average	--	--	--	--	--	--	--	--
Required	--	--	--	--	--	--	--	--

Table 5: Spectrum & Polar Plot of DIM-T35-E14-4.5W-Frost 2700K

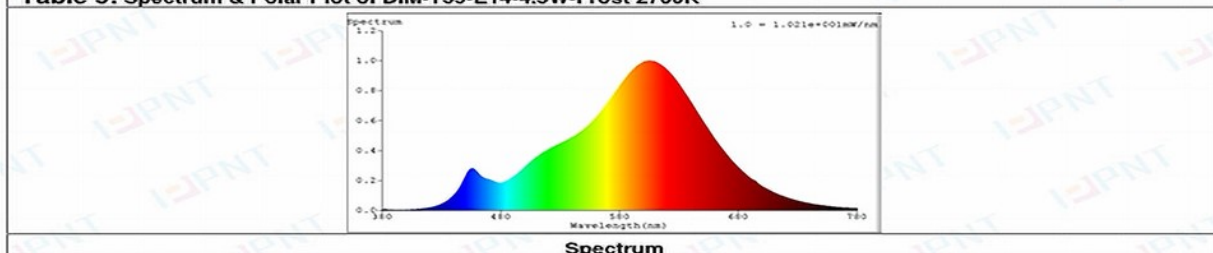


Pioneer Testing Technology
(Hangzhou) Co., Ltd
翰思检测技术(杭州)有限公司

Room 401, Building 41, No.536 Shunfeng Road,
Yuhang District, Hangzhou City 311199, Zhejiang
Province, China.

Tel: +86-13336138598
Email: pnt001@pnt-lab.com

Model placed on the Union market from 31/01/2022



EPREL registration number: 766914

<https://eprel.ec.europa.eu/qr/766914>

Supplier: Orion Leuchten-Fabrik Molecz & Sohn Gesellschaft m.b.H. (Manufacturer)

Website: www.orionleuchten.at

Customer care service:

Name: QC/LABOR

Website: www.orion.co.at

Email: a.yasar@orion.co.at

Phone: 0676842740866

Address:

Oberlaaerstraße 284
1230 Wien
Austria